

## SEVEN SEGMENT NUMERIC DISPLAY

High Performance GaP/GaAsP  
0.3 inch Character Height  
High Contrast  
Wide Viewing Angle  
Common Anode - MR231A  
Common Cathode - MR231C

## ABSOLUTE MAXIMUM RATINGS

Power Dissipation / Segment	80mW
Peak Forward Current / Segment	160mA
Continuous Forward Current / Segment	40mA
Reverse Voltage / Segment	5V
Operating Temperature Range	-25 to +85°C
Storage Temperature Range	-25 to +85°C
* Note : Pulse Width = 1mS, Duty Ratio = 1/10.	

## ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C) / segment

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	VF			2.0	V	IF=20mA
Luminous Intensity	IV	150	200		μcd	IF=10mA
Segment to Segment Luminous Intensity Ratio				2:1		IF=20mA
Peak Wavelength	λp		660		nm	IF=20mA
Spectral Line Half Width	Δλ		20		nm	IF=20mA



MICRO ELECTRONICS LTD.


38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

May-96

# MR231 A/C


## MECHANICAL OUTLINE:

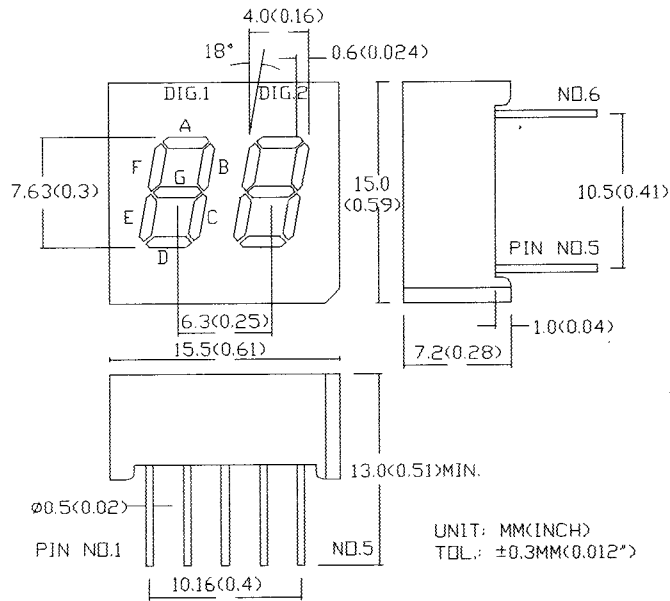

## CIRCUIT DIAGRAM:

### (A) COMMON ANODE

PIN NO. 10

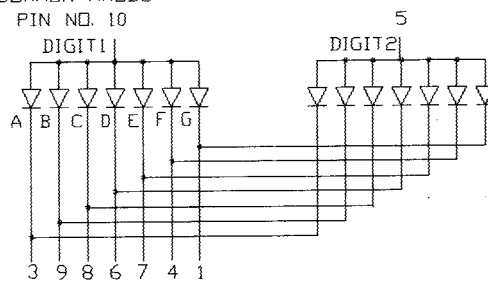

### (B) COMMON CATHODE

PIN NO. 10

